




## HORIZONTAL FIXATION

The GoTx® 1900FX/2600FX are powerful fixation units for sublimation and pigment inks. Designed to run inline with the GoTx® 2190/2260 printers for seamless productivity or off line for greater productivity.

Utilising quad zone heater element plates below and above the media horizontally where the fabric is not touched during cure. For consistency we do not employ IR heatlamps to avoid cool cure zones across the media. Fixation on a horizontal path provides better control and avoids smoke, steam or oil which can be dragged across the media = ghost free imaging.

- Up to 95m<sup>2</sup> per hour output, with variable top, bottom radial axial fans for steam removal
- The GoTx® fixation modules are designed for uninterrupted production and media is NOT touched during transfer fixation process
- Optional air scrubber available

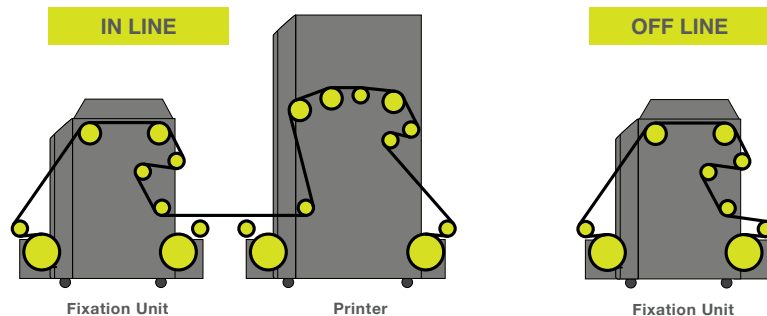

## SPECIFICATIONS

	1900mm	2600mm
Width x Depth x Height (mm)	2900 x 700 x 1100 (114" x 27" x 43")	3400 x 700 x 1100 (134" x 27" x 43")
Media size (mm)	900-1900	1200-2600
Elements / Zones	12 / 4	12 / 4
Speed	> 80m <sup>2</sup> /Hour	> 80m <sup>2</sup> /Hour