




PRE-TREATMENT

Precise even pre-treatment of fabrics for pigment inks are essential for providing added colour gamuts and wash fastness. The GoTx[®] pre-treatment module was designed to do more than just wet fabric. An atomizing nozzle lays the correct amount of pre-treatment solution to the top surface of fabric without the underside getting wet. This results in the fabric hand and weight not changing in production.

A quad zone horizontal fixation unit dries the fabric inline so its ready to print straight from the GoTx[®] pre-treat machine.

Designed to run inline with the GoTx[®]2190/2260 printer series or off line for greater productivity.

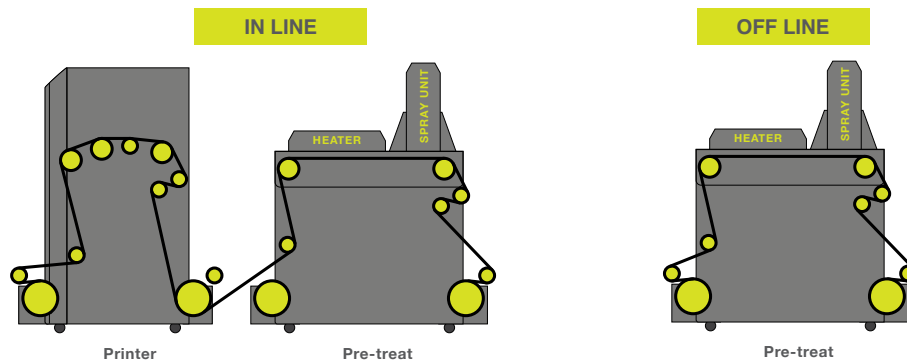

Specifications

| | 1900mm | 2600mm |
|-----------------------------|---------------------------------------|---------------------------------------|
| Width x Depth x Height (mm) | 2700 x 1800 x 1300 (106" x 71" x 51") | 3400 x 1800 x 1300 (134" x 71" x 51") |
| Media size (mm) | 1900 | 2600 |
| Nozzles/Atomizer | 2 | 2 |
| Speed | >80m ² /hour | >80m ² /hour |